

NITECORE®

P10i *i-GENERATION*

21700 ULTRA COMPACT TACTICAL FLASHLIGHT

STROBE READY™

1800 Lumens

USB-C Rechargeable



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



i-GENERATION **ULTIMATE REVOLUTION**

 **Output**

P10i 1800 Lumens

P10 V2 1100 Lumens

P10 800 Lumens

 **Throw**

P10i 290 Meters

P10 V2 201 Meters

P10 193 Meters

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

FUSION OF TACTICS AND TECHNOLOGY

- Utilizes a Luminus SST-40-W LED with a max output of 1,800 lumens
- Powered by the optimized 21700 i Series Battery
- 2nd Generation STROBE READY™ Technology
- Compatible with i Series modular extensions

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

18000

LUMENS MAX OUTPUT

290 METERS MAX THROW

TACTICAL BLAZING PERFORMANCE

Utilizing a Luminus SST-40-W LED and an optical system combined with crystal coating and "Precision Digital Optics Technology" (PDOT), the P10i has a max output of 1,800 lumens, a max throw of 290 meters and a peak beam intensity of 21,100cd, ideal for law enforcement, assault operations, self defense, search and patrols.

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



2nd GENERATION

(Patent No.: ZL201320545349.4)

STROBE READY™ TECHNOLOGY

SPECIALLY DESIGNED FOR TACTICAL APPLICATIONS

- Enables a STROBE access in any state
 - Inset pedal design to avoid accidental activation
- (US Patent No.: 15/846299 US10237955B1)

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

ULTIMATE DUAL TAIL SWITCH DESIGN



TACTICAL TAIL SWITCH

For Momentary-on and Constant-on Illumination



Tactical Momentary-on



Constant-on



STROBE READY™ MODE BUTTON

For Output Adjustment and Instantly Accessing STROBE



HIGH

1,800 Lumens



MID

280 Lumens



LOW

35 Lumens



STROBE



Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

USB-C RECHARGEABLE

CHARGING PORT COVER •

Provides excellent water, dust and impact resistance

USB-C CHARGING PORT •

Available with a reversible plug-in



NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



REVOLUTIONARY AND POWERFULLY UPGRADED

21700i (Patent No. ZL201820118916.0, US Patent Pending) **SERIES BATTERY**

- The 21700 i Series Battery is a patent product developed by NITECORE.
- Enables a highly efficient output by minimizing the loss of power due to internal resistance.
- Features dual way output with positive and negative polarities at both ends and a high energy density.
- Compatible with modular extensions of intelligent communications and controlling systems.

* The NL2140i rechargeable Li-ion battery (4,000mAh) is included.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

ULTRA COMPACT AND LIGHTWEIGHT

WITH A STANDARD TUBE DIAMETER OF 1" (25.4MM)

The spatial distribution is precisely calculated so that the electronic components can be packed in an ultra compact housing while upgrading its performance. The anti-slip knurling on the tube guarantees a firm grip within your palm and offers an unprecedented user experience.

Length: 147mm (5.79") Head Diameter: 25.4mm (1") Tube Diameter: 25.4mm (1")
Tail Diameter: 28.5mm (1.12") Weight: 84g (2.96oz)



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

**50 HOURS EXTENDED RUNTIME
ON LOW LEVEL (35 LUMENS)**

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (5,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®


P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



ATR (Patent No. ZL201510534543.6)

(ADVANCED TEMPERATURE REGULATION)

The integrated ATR technology regulates the output of the P10i according to the working condition and ambient environment to maintain the optimal performance.

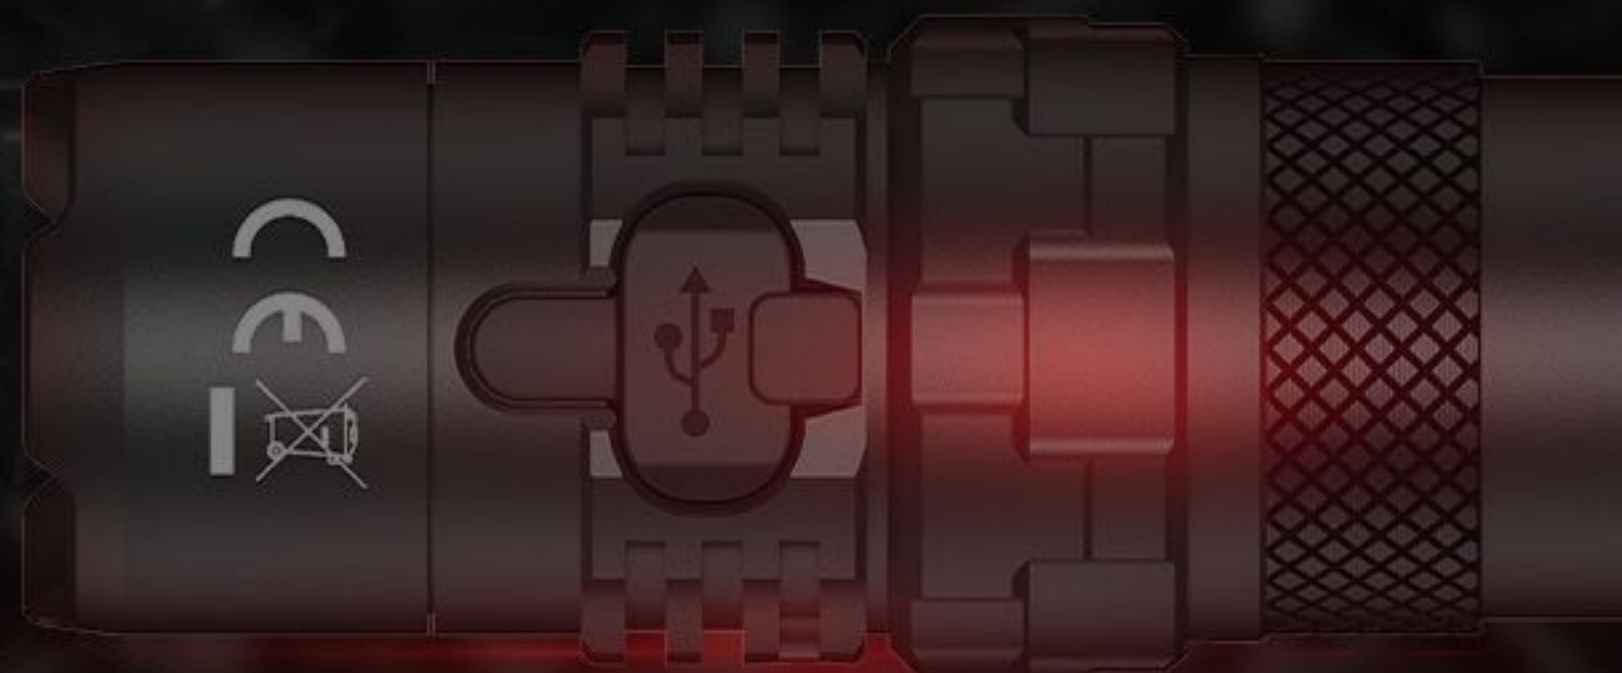

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

FULL PACKAGE OF TACTICAL ACCESSORIES

INCLUDED



NL2140i Battery
4,000mAh



CR123 Battery
Magazine



Tactical Holster
NTH10



USB-C Charging
Cable



Lanyard



Clip



Spare O-ring



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

CUSTOMIZABLE TACTICAL ACCESSORIES

OPTIONAL

P10i i-GENERATION

21700 ULTRA COMPACT TACTICAL FLASHLIGHT



NITECORE Gun / Helmet Mounts

GM02MH



GM03



GM04



LMA1



Tactical Ring Pro

NTR10



Diffuser

NDF25



Traffic Wand

NTW25



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®



NTH10 TACTICAL HOLSTER INCLUDED

Specially designed for law enforcement, the compact NTH10 Tactical Holster enables a quick draw of the flashlight with an adjustable stopper on the clip to suit belts of various sizes and compatible with the MOLLE System.

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



Optional Accessories

HRM2 *HELMET MOUNT*

Specially designed to mount a tactical flashlight on riot helmets, it is constructed from engineering plastic featuring solidness, lightweight and wearproof. It can be easily mounted and conveniently adjust the beam angle with a 3D pivoting system.




These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



- Momentary On
- Output Adjustment

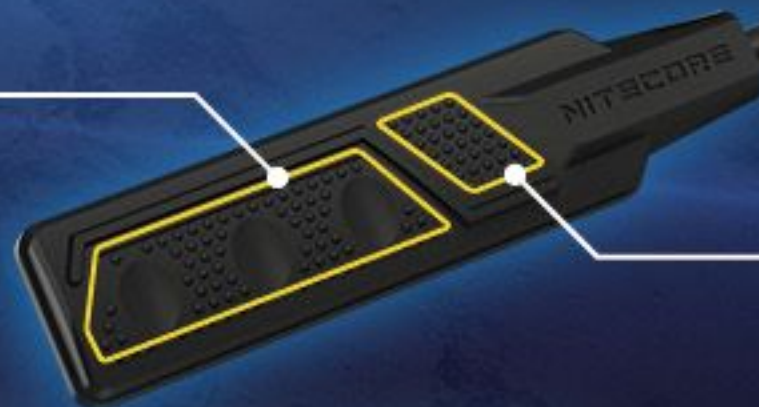

- Constant On/Off
- STROBE

Optional Accessories

RSW2i USB-C REMOTE SWITCH

Specially designed for i-Generation Flashlights, it has a USB-C port for charging or connecting the cable part of the remote switch.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT



Optional Accessories

F21i

FAST CHARGING POWER SYSTEM



Combined with a 21700 i Series Battery, it can be used as a battery charger or a power bank with a max power of 18W and protocols of QC 3.0 and PD. It is constructed from lightweight and fire retardant PC materials.

Technical Data

Input: USB-C: 5V=2A / 9V=2A

Output: USB-C: 5V=3A / 9V=2A / 12V=1.5A

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

SPECIALLY DESIGNED NEW SLOTS

COMPATIBLE WITH NTR10 TACTICAL RING PRO



- Keeps a two-handed grip of the firearm while carrying or operating a flashlight
- Easy for continuous and stable shooting and reloading

COMPATIBLE WITH POCKET CLIP



- Clipped in the pocket, the backpack or the MOLLE System
- Available for attaching the lanyard


These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

ALL-WEATHER APPLICABLE

IP68 RATED *2m Submersible and Waterproof
1m Impact Resistant*

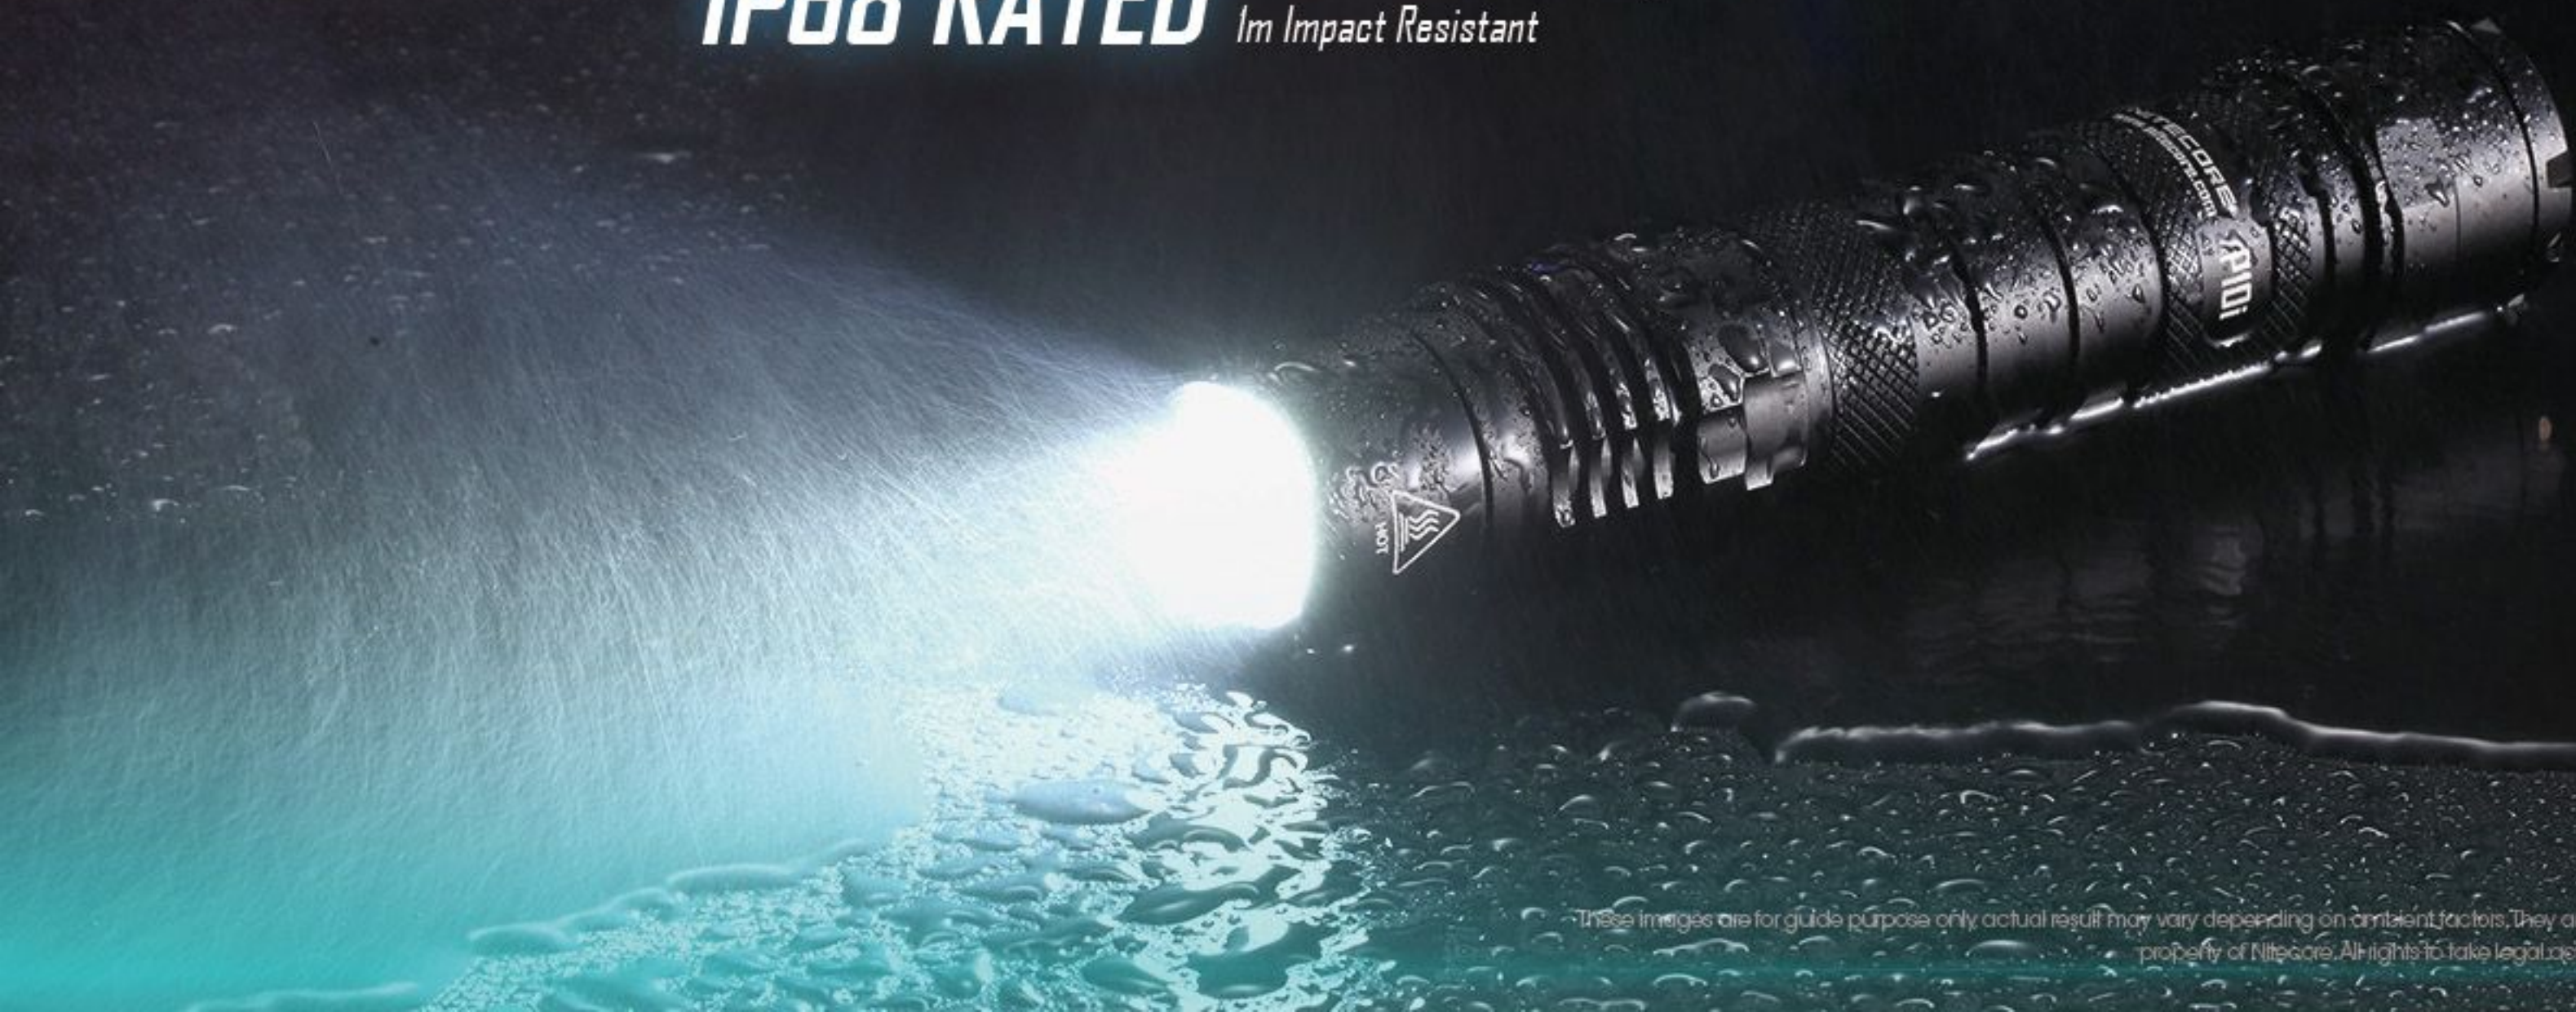

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the Intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION

21700 ULTRA COMPACT TACTICAL FLASHLIGHT

TECHNICAL DATA

Using a 4,000mAh 21700 Li-ion Battery:

FLI STANDARD	HIGH	MID	LOW	STROBE
	1,800 Lumens	280 Lumens	35 Lumens	1,800 Lumens
	1h 30min	7h 15min	38h	—
	290m	110m	44m	—
	21,100cd	3,070cd	485cd	—
	1 m (Impact Resistance)			
	IP68, 2m (Waterproof and Submersible)			

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 1 x 21700 Li-ion battery (4,000mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

Using 2 x CR123 Batteries:

FLI STANDARD	HIGH	MID	LOW	STROBE
	1,100 Lumens	280 Lumens	35 Lumens	1,100 Lumens
	1h 15min	4h	20h	—
	220m	110m	44m	—
	12,200cd	3,070cd	485cd	—
	1 m (Impact Resistance)			
	IP68, 2m (Waterproof and Submersible)			

Note: The stated data is measured in accordance with the international flashlight testing standard ANSI/PLATO FL 1-2019, using 2 x CR123 lithium batteries (1,700mAh) under laboratory conditions. The data may vary in real world use due to different battery usage or environmental conditions.

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.

NITECORE®

P10i i-GENERATION
21700 ULTRA COMPACT TACTICAL FLASHLIGHT

FEATURES

- Utilizes a Luminus SST-40-W LED with a max output of 1,800 lumens
- An optical system combined with crystal coating and "Precision Digital Optics Technology" (PDOT)
- Max peak beam intensity of 21,100cd and max throw of 290 meters
- Highly efficient constant current circuit provides a stable output for up to 50 hours
- Dual tail switches enable intuitive operations for tactical applications
- 3 brightness levels and 1 special mode available
- STROBE READY™ Technology to enable a quick access to STROBE Mode (Patent No.: ZL201320545349.4)
- STROBE Mode uses randomly changing frequencies for stronger dizzying effects
- Intelligent Li-ion battery charging circuit with a USB-C port
- NITECORE 21700 Li-ion battery included (NL2140i 4,000mAh)
- A power indicator beside the charging port indicates the remaining battery power (Patent No. ZL201220057767.4)
- The power indicator can display the battery voltage ($\pm 0.1V$)
- Incorporated Advanced Temperature Regulation (ATR) module (Patent No. ZL201510534543.6)
- Optical lenses with double-sided scratch resistant coating
- Constructed from aero grade aluminum alloy
- HA III military grade hard-anodized finish
- Waterproof and dustproof rating in accordance with IP68 (2 meters submersible)
- Impact resistant to 1 meter

These images are for guide purpose only, actual result may vary depending on ambient factors. They are the intellectual property of Nitecore. All rights to take legal action are reserved.